

Scope of Work for Bid

NORTHWESTERN LSD-PARKING LOT RESURFACING PROJECT

Description of Work - Elementary School (SEE MAP ON NEXT PAGE FOR LAYOUT)

**Area #1 - Mill with Overlay-Approximately 74.020 sf**

Mill out 2" existing asphalt surface

Clean-up with power broom and haul debris off site unless directed otherwise by district official

Apply tack coat

Pave 2" of 448 type 1 asphalt

Compact asphalt using vibratory roller

Seal edges and transition joints with hot rubber, as needed

Clean site and haul away debris

Line striped to current layout and reinstall parking curbs back to their original locations

**Area #4 - Mill with Overlay-Approximately 48.175 sf (Bus Pick Up Lot)**

Mill out 2" existing asphalt surface

Clean with power broom and haul away debris off site

Pave 2" of 448 type 1 asphalt

Compact asphalt using vibratory roller

Seal edges and transition joints with hot rubber, as needed

Line striped to current layout and reinstall parking curbs back to their original locations

**Area #2 - Crack fill, seal coat and stripe-Approximately 39.990 sf**

Clean surface area to be seal coated with forced air removing dirt and debris

Fill all cracks ¼" and larger with hot rubber crack fill, excluding alligator cracking

Broom brush all edges near buildings with sealer

Apply 2 coats of sealer with 31bs of sand added per gallon of sealer for traction and wear

Line stripe to current layout

**Area A- Patching Approximately 567 sf (also include depth)**

2" Mill with 24" width

**Area #3 - Crack fill, seal and paint-Approximately 28.155 sf (Playground)**


Clean surface area to be seal coated with forced air removing dirt and debris

Fill all cracks ¼" and larger with hot rubber crack fill, excluding alligator cracking

Broom brush all edges near buildings with sealer

Apply 2 coats of sealer with 31bs of sand added per gallon of sealer for traction and wear



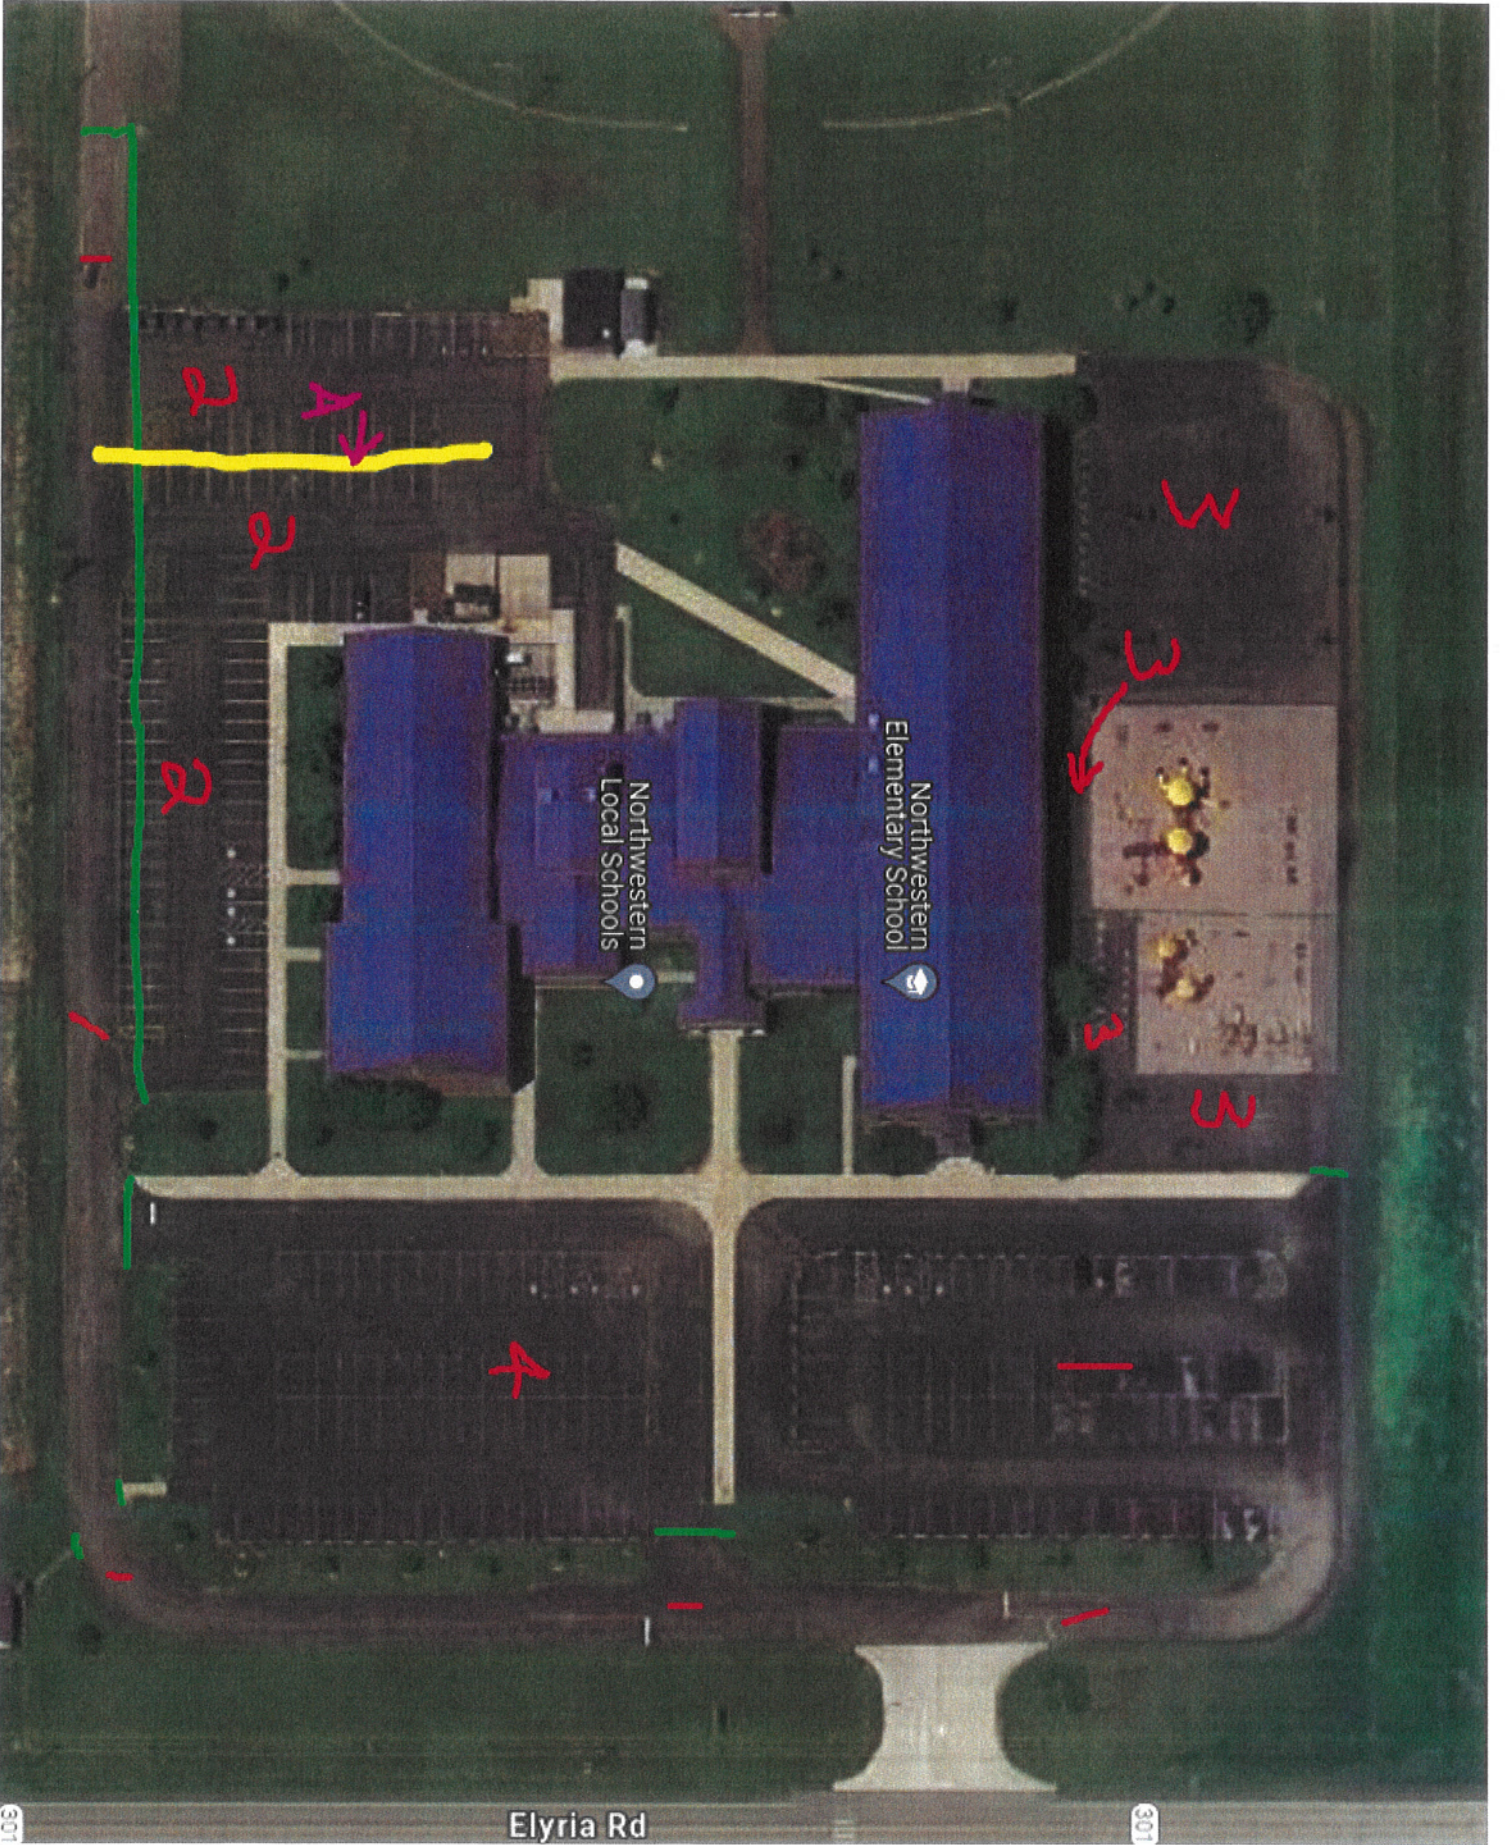

Elyria Rd

301

301



Description of Work - Middle School (SEE MAP ON NEXT PAGE FOR LAYOUT)

**Area #1- Mill with Overlay-Approximately 6.671 sf**

Mill out 2" existing asphalt surface

Clean-up with power broom and haul debris off site unless directed otherwise by district official

Apply tack coat

Pave 2" of 448 type 1 asphalt

Compact asphalt using vibratory roller

Seal edges and transition joints with hot rubber, as needed

Clean site and haul away debris

Line stripe to current layout

**Area #3 - Sealcoat-Approximately 36.429 sf (Bus Parking Lot)**

Clean surface area to be seal coated with forced air removing dirt and debris

Broom brush all edges near buildings with sealer

Apply 2 coats of sealer with 3lbs of sand added per gallon of sealer for traction and wear

Line stripe to current layout

**Area #2 - Sealcoat-Approximately 11.605 sf (Driveway)**

Clean surface area to be seal coated with forced air removing dirt and debris

Broom brush all edges near buildings with sealer

Apply 2 coats of sealer with 31bs of sand added per gallon of sealer for traction and wear

Line stripe to current layout

**BID INFORMATION, IMPORTANT DATES AND CONTACT INFORMATION:**

Bids must be received by Friday May 10, 2024, by 11:30 am.

Bids must be for all paving projects. One bid for all work to be completed.

There is not a requirement for a bid bond. Prevailing wage is not a requirement of this project.

Payment for the total project bid will be made to the successful bidder at the completion of the project by the district.

All work to be completed between June 10, 2024, and August 9, 2024. The district has the right to reject all bids.

Deliver bids to Northwestern LSD Administrative Office, 7571N. Elyria Road, West Salem, OH 44287. To the attention of Acting Superintendent Julie McCumber.

The district will host a project walkthrough of the paving project for all prospective bidders on Tuesday April 30, 2024, at 10:00 am.

All prospective bidders interested in the walkthrough please arrive at the District Administrative Office located at 7571 N. Elyria Road, West Salem, Ohio 44287.

Contact Ms. Cathie Franks, Executive Secretary, at (419) 846-3400 x4301 or [nrws\\_cfranks@tccsa.net](mailto:nrws_cfranks@tccsa.net), with any questions.

**NOTE CHANGE DETAILS IN YELLOW HIGHLIGHT WERE UPDATES TO THE SCOPE OF WORK**





Northwestern  
Superintendent  
Temporarily closed

Husky Stadium

2

3

7571

7571

7571